


## ELEVATOR PIT/SUMP PIT

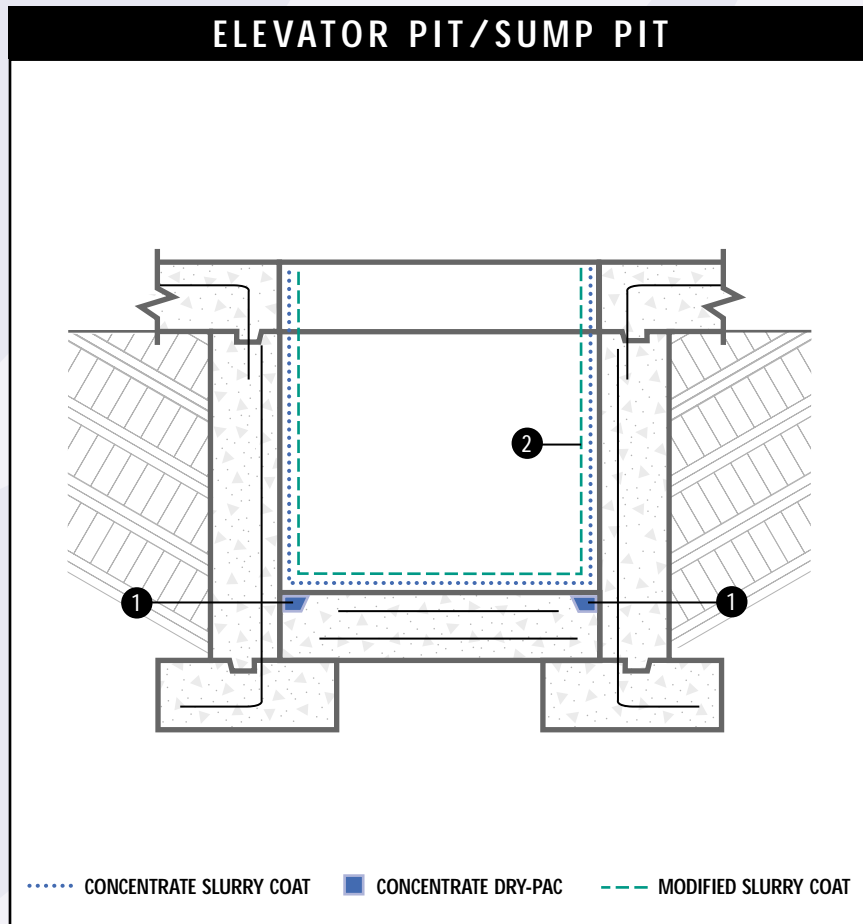

- ① In sealing strip, apply one coat of Xypex Concentrate at the rate of 1.5 lb./sq. yd. (0.8 kg/m<sup>2</sup>), then fill slot to surface with Xypex Concentrate in Dry-Pac form.
- ② Apply one slurry coat of Xypex Concentrate to walls and floor slab at a rate of 1.25 to 1.5 lb./sq. yd. (0.65 to 0.8 kg/m<sup>2</sup>). After the Concentrate has set but while it is still “green”, apply a coat of Xypex Modified at the rate of 1.25 to 1.5 lb./sq. yd. (0.65 to 0.8 kg/m<sup>2</sup>).

Note: For hydraulic elevators, please contact your Xypex representative for detail drawings.

Schematic diagram shows Xypex application only and does not depict the standard requirements for waterstops or expansion joint sealants.

The specifier can consider the alternative use of Xypex Dry Shake or Xypex Admix, where applicable.

Refer to Standard Specifications for further information.