


FERRO-CEMENT BOAT/CAISSON/FLOATING DOCK

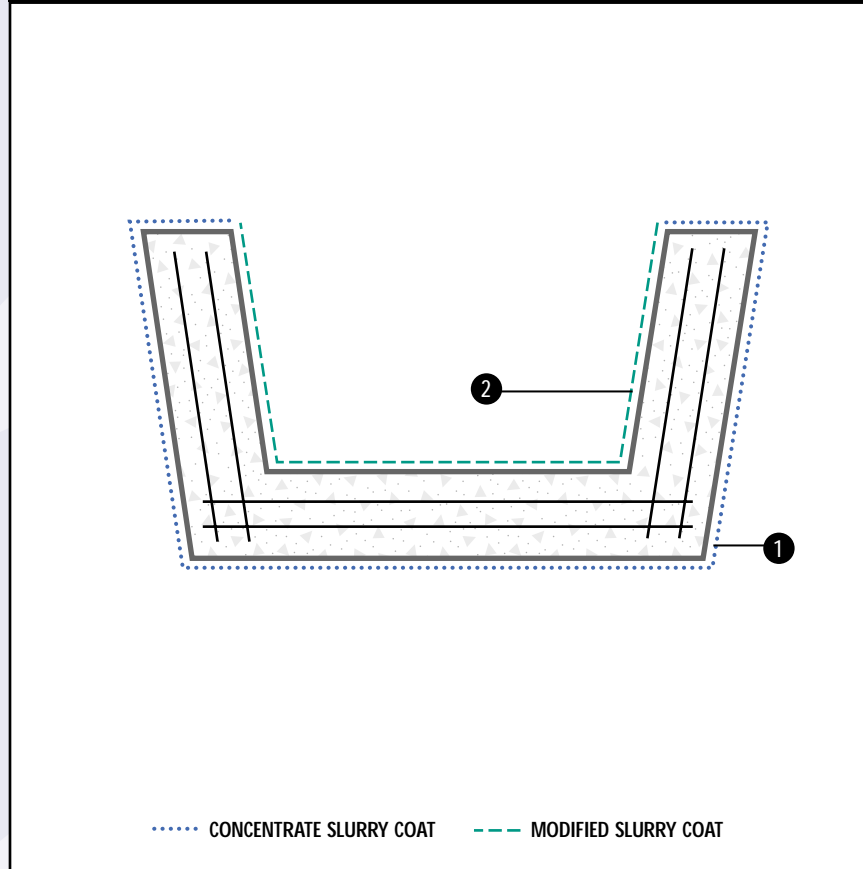

- ❶ Apply one slurry coat of Xypex Concentrate to hull exterior, gunwhales, and all exterior decks at the rate of 1.5 lb./sq. yd. (0.8 kg/m²).
- ❷ Apply one coat of Xypex Modified to interior surface of hull at the rate of 1.5 lb./sq. yd. (0.8 kg/m²).

Note: In the case of sealed, hollow-core caissons, step 2 is eliminated and the Concentrate slurry coat in step 1 should extend over entire exterior of unit.

Schematic diagram shows Xypex application only and does not depict the standard requirements for waterstops or expansion joint sealants.

The specifier can consider the alternative use of Xypex Dry Shake or Xypex Admix, where applicable.

Refer to Standard Specifications for further information.